



Figure 1 shows an application of the LTC3415 in a 3.3V to 1.8V/7A step-down converter configuration. Figure 2 shows its efficiency and power loss vs load current in Burst Mode operation. Efficiency reaches as high as 92%. Figure 3 shows its fast transient response to a 5A load step. As shown,  $V_{OUT}$  recovers in 10 $\mu$ s with a dip of less than 100mV. Frequency can be changed easily from its nominal 1.5MHz to 1MHz or 2MHz by simply strapping the PLLPF pin to SGND or  $SV_{IN}$ , respectively. Or if a particular frequency is desired, an external clock can be used to synchronize the operating frequency from 750KHz to 2.25MHz with the internal phase-lock-loop. Spread spectrum operation is available for EMI-sensitive applications by tying the CLKIN pin to  $SV_{IN}$ .

For applications that require controlled output voltage tracking between various outputs in order to prevent excessive current draw or even latch-up during turn-on and turn-off, the LTC3415 has a Track pin that allows the user to program how its output voltage ramps dur-

ing start-up and shutdown. Figure 4 shows the output waveforms of two LTC3415s in track mode.

### Greater than 7A Outputs

By stacking multiple LTC3415s together, more output power is attained without increasing the number of input and output capacitors. Operating multiple LTC3415s out of phase not only allows accurate current sharing, but it also reduces the overall voltage ripple at both the input and the output, thus allowing fewer capacitors. Figure 5 shows an efficiency curve of the LTC3415 in 1-phase, 2-phase, 3-phase, 4-phase and 6-phase operation.

### Conclusion

With its many operational features and compact total solution size, the LTC3415 is an ideal fit for today's point-of-load power supplies. It allows for accurate, compact, efficient and scalable power supplies with advanced features, including tracking and margining.

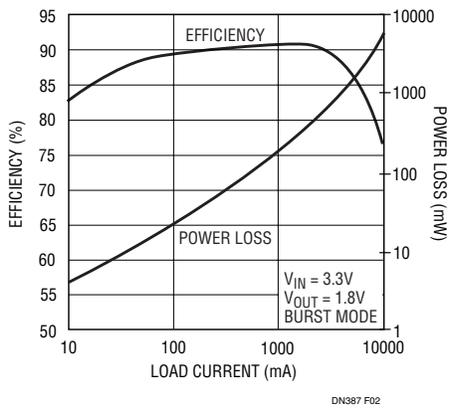


Figure 2. Efficiency and Power Loss of 3.3V to 1.8V/7A Application in Figure 1

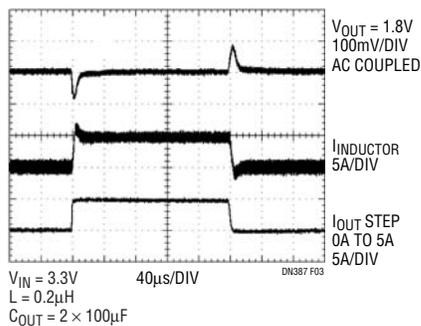


Figure 3.  $V_{OUT}$  Transient Response to a 0A to 5A Load Step of the Circuit Shown in Figure 1

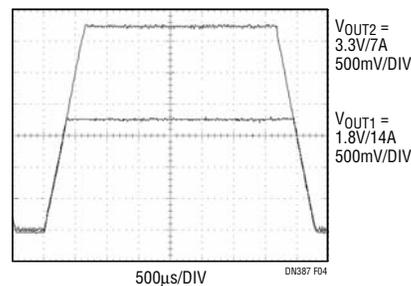


Figure 4. Output Tracking of Two LTC3415s

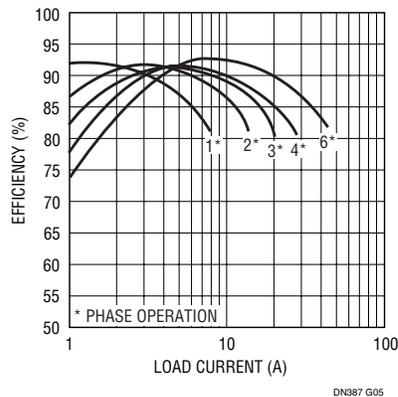


Figure 5. Efficiency vs Load Current of LTC3415s in Multiphase Operation

[Data Sheet Download](#)

[www.linear.com](http://www.linear.com)

For applications help,  
call (408) 432-1900, Ext. 2759