

PMP6009
TPS92075
230Vac Triac Dimmable 10W LED Driver
Reference Design



June, 2013

230Vac Triac Dimmable 10W LED Driver Reference Design

1 Introduction

This TPS92075 reference design presents the TPS92075 AC-DC controller driving an 80V string of LEDs at 100mA in a buck configuration. It is compatible with most 230Vac triac dimmers. The TPS92075 is designed for non-isolated, phase dimmable, buck PFC LED drivers and features constant off-time control, digital phase angle decoder and digital reference control. Additional features include cycle-by cycle switch current limit, VCC under-voltage lockout, and output over-voltage protection.

2 Description

This reference design provides a high-brightness LED driver based on the TPS92690Q1 configured as a power factor corrected buck regulator that is triac dimmable. It is designed to operate with an input voltage in the range of 198VAC to 264VAC with a 230-VAC nominal input voltage. This design is set up for an 8W output power with an output voltage range of 70 V to 90 V.

2.1 Typical Applications

This converter design describes an application of the TPS92075 as an LED driver with the specifications listed below. For applications with a different output voltage or current range refer to the TPS92075 datasheet.

2.2 Features

2.2.1 Connector Description

This section describes the connectors of the reference design board.

2.2.1.1 J8

This connector is for the AC input to the board. Use the screw down terminal to connect Line and Neutral to the circuit.

2.2.1.2 J5

This connector is for the LED load. Use the screw down terminal to connect the LED anode to the pin marked LED+ and connect the LED cathode to the pin marked LED-.

3 Electrical Performance Specifications

Table 1: TPS92075 230Vac Triac Dimmable Buck Electrical Performance Specifications

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Input Characteristics					
Voltage range	Normal operation	198	230	264	VAC
Maximum input current	At 230VAC 50Hz input voltage		0.05		A
Output Characteristics					
Output voltage, VOUT		75	80	85	V
Output load current, IOUT	Input voltage = 230V 50Hz, Load = 80V LED	90	105	120	mA
Output current regulation	Input voltage = 230V 50Hz, Load = 80V LED		< ±5		%
Output current ripple	Input voltage = 230V 50Hz, Load = 80V LED		<40		mApp
Systems Characteristics					
Switching frequency	Input voltage = 230V 50Hz, Load = 80V LED		65		kHz
Power Factor	Input voltage = 230V 50Hz, Load = 80V LED		0.95		
Efficiency	Input voltage = 230V 50Hz, Load = 80V LED		85		%

5 Performance Data and Typical Characteristic Curves

Figures 2 through 9 present typical performance curves for TPS92075 230Vac Triac Dimmable 10W LED Driver

5.1 Efficiency

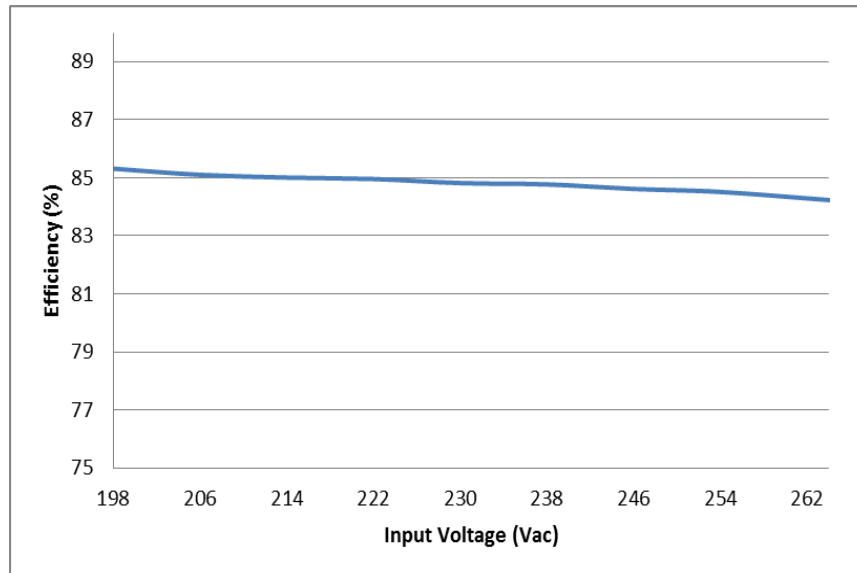


Figure 2: Efficiency

5.2 Line Regulation

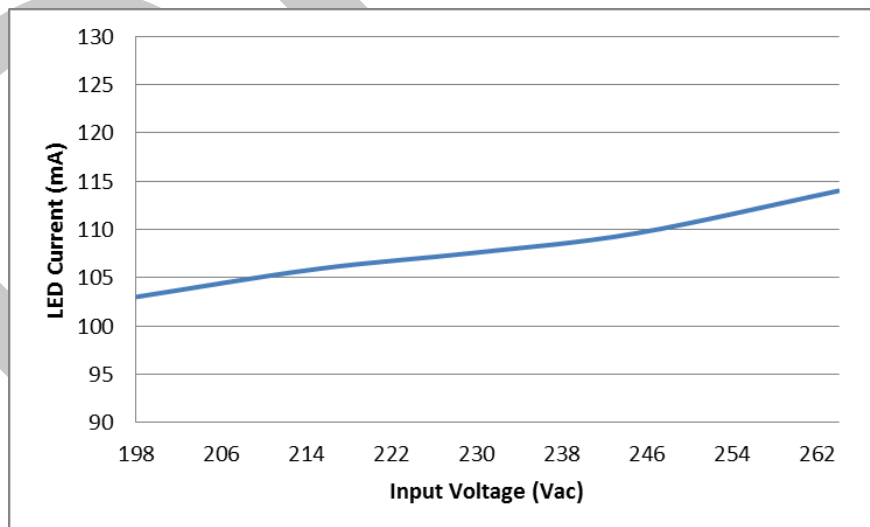


Figure 3: Line Regulation

5.3 Triac Dimmer Response

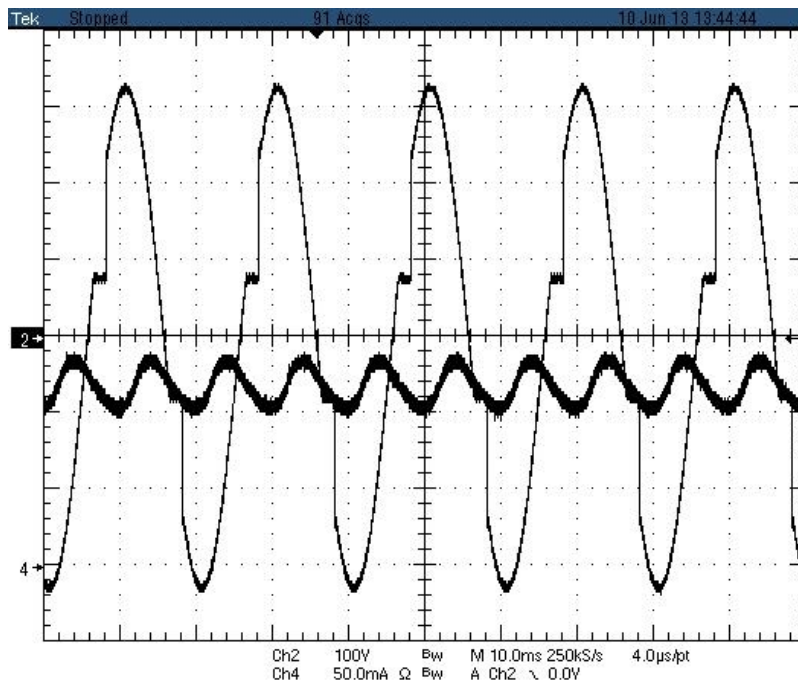


Figure 4: Triac Maximum Level Waveform Ch2: AC Input Ch4 LED current

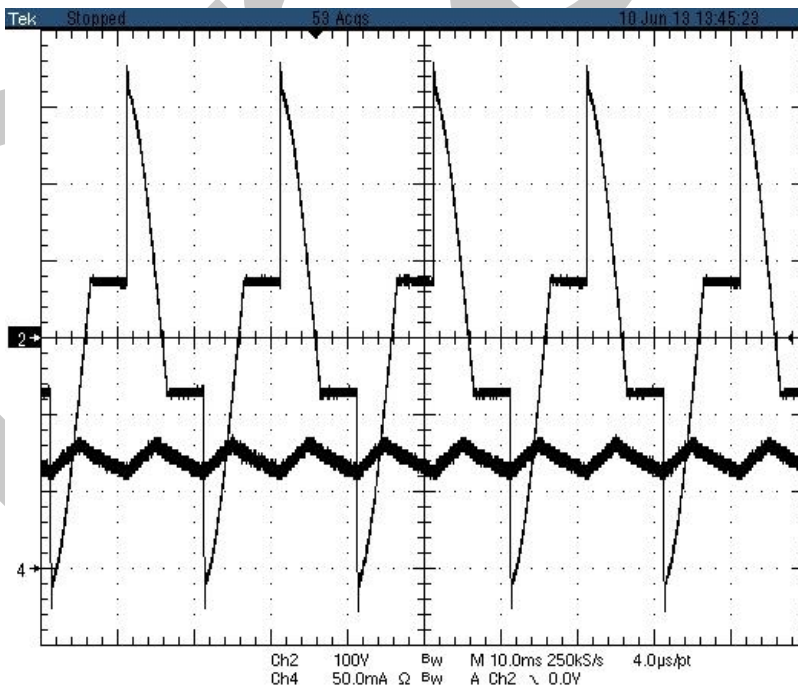


Figure 6: Triac 90 Degree Conduction Angle Waveform Ch2: AC Input Ch4 LED current

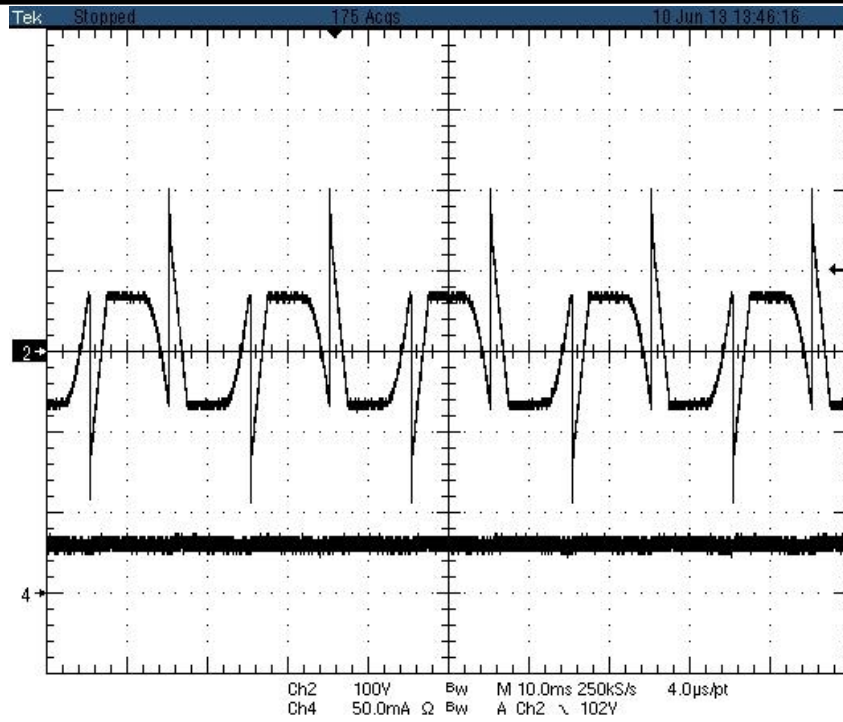


Figure 7: Triac Minimum Level Waveform Ch2: AC Input Ch4 LED current

5.4 EMI Performance

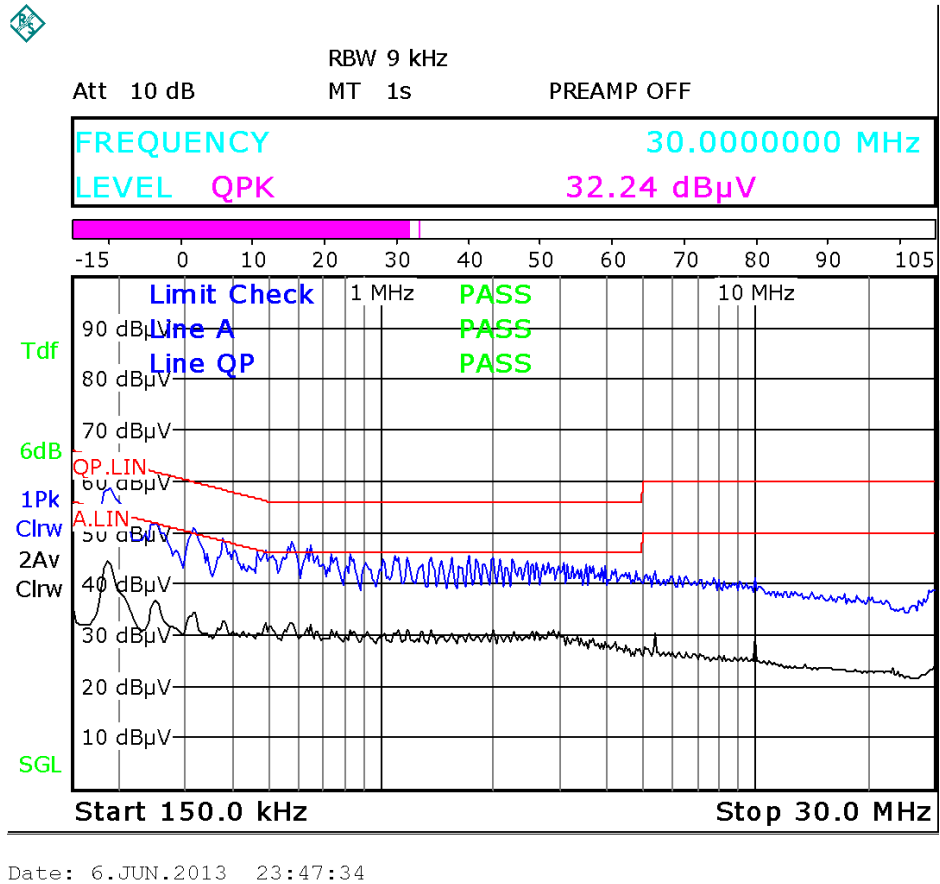


Figure 8: 230VAC Line-Conducted EMI Scan

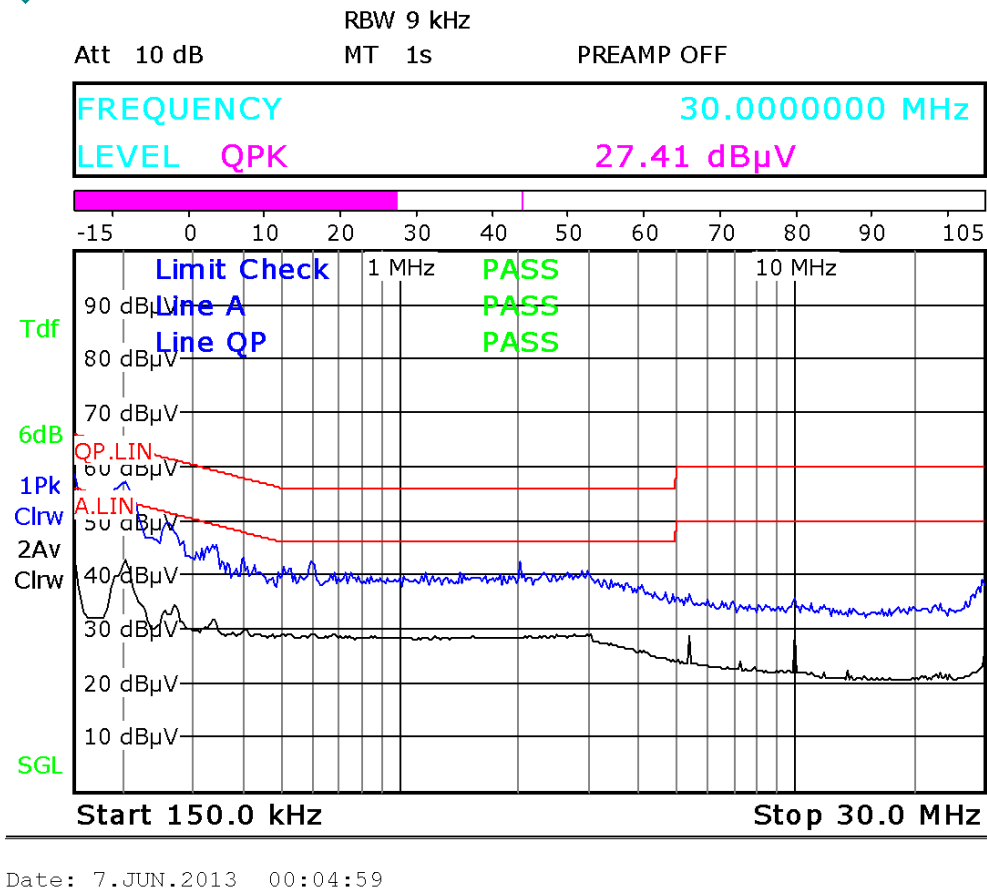


Figure 9: 230VAC Neutral-Conducted EMI Scan

6 TPS92075 230Vac Triac Dimmable 10W LED Driver Reference Design PCB layout

The following figures (Figure 13 through Figure 14) show the design of the printed circuit board.

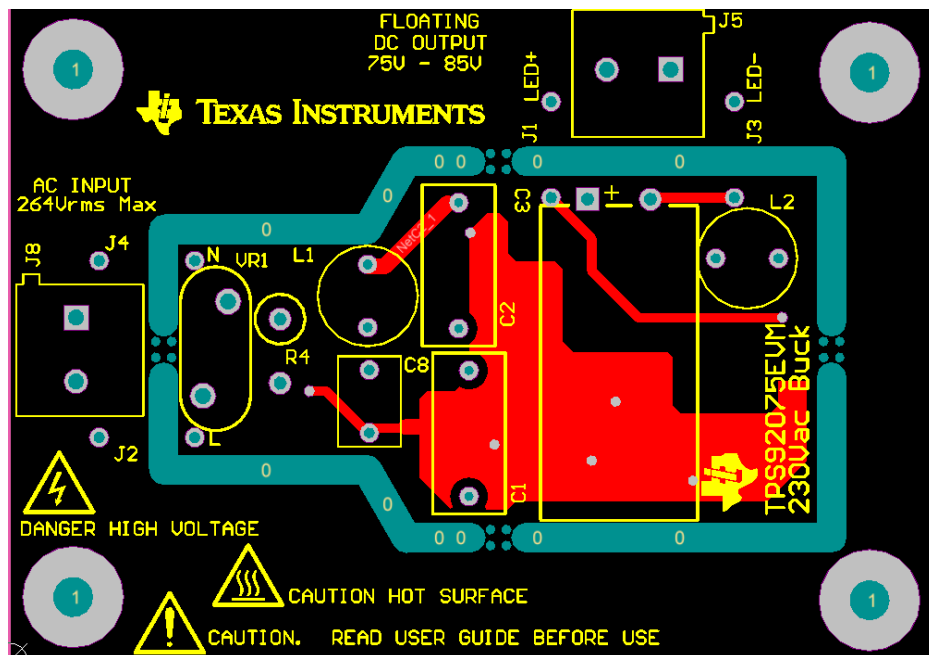


Figure 10: Top Layer and Top Overlay (Top view)

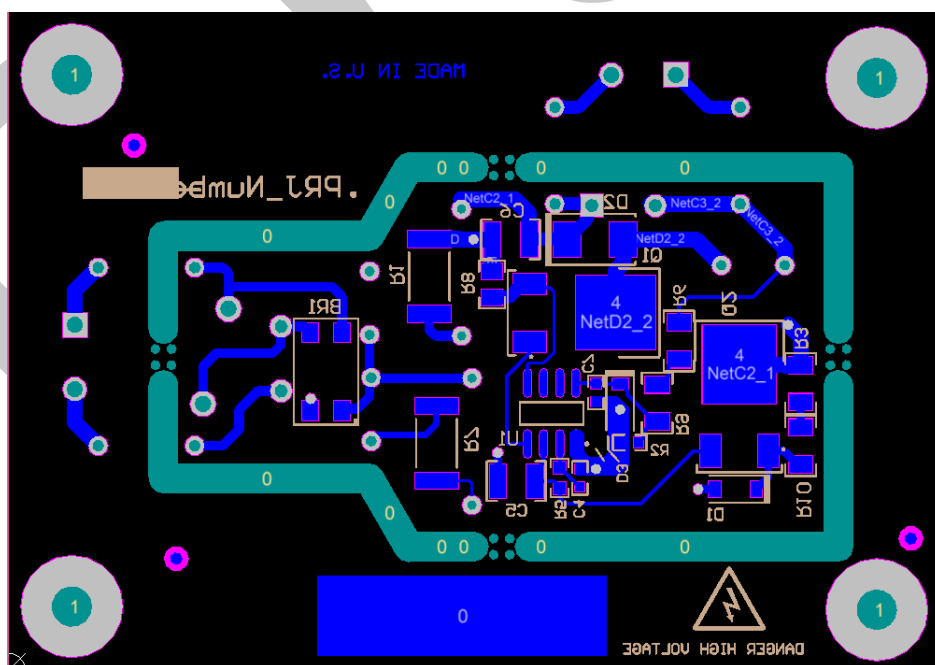


Figure 11: Bottom Layer and Bottom Overlay (Bottom view)

Table 2: The TPS92075 230Vac Dimmable components list according to the schematic shown in Figure 1

REFERENCE DESIGNATOR	QTY	VALUE	DESCRIPTION	SIZE	MFR	PART NUMBER
U1	1		Non-isolated Phase Dimmable Buck PFC LED Driver with Adaptive Reference Control	M08A	TI	TPS92075D
C1,C2	2	0.1 μ F	CAP FILM 0.1UF 630VDC RADIAL	13mmx6mm	EPCOS	B32921C3104
C3	1	120 μ F	Capacitor, Aluminum, 100V	12.5mmx20mm	Nichicon	UHE2A121MHD6
C4	1	220 pF	CAP, CERM, 220pF, 50V, 5%,NP0	0603	MuRata	GRM1885C1H221JA01D
C5	1	22 μ F	CAP CER 22UF 25V 20% X7R	1210	Taiyo Yuden	TMK325B7226MM-TR
C6	1	0.1 μ F	CAP CER 0.1UF 630V 10% X7T	1210	TDK	C3225X7T2J104K160AC
C7	1	4700 pF	CAP, CERM, 4700pF, 50V, +/-10%, X7R	0603	MuRata	GRM188R71H472KA01D
C8	1	0.022 μ F	CAP FILM 0.022UF 400VDC RADIAL	7.2mmx4.5mm	Kemet	R82MC2200
D1	1	15V	Diode, Zener, 15V, 500mW	SOD-123	On Semi	MMSZ4702T1G
D2	1	600V	DIODE ULT FAST 600V 1A SMB	SMB	MCC	ER1J-LTP
D3	1	4.7V	DIODE ZENER 4.7V 500MW	SOD-123	Diodes Inc	BZT52C4V7-13-F
L1	1	3.9 mH	INDUCTOR 3900UH 0.18A	7.8mmx7.5mm	Würth	744 730 392
L2	1	2.2 mH	INDUCTOR 2200UH 0.36A	9mmx12mm	Bourns	RLB9012-222KL
Q1, Q2	2	600V	MOSFET N-CH 600V 3.9A	DPAK	Fairchild	FCD4N60TM
R1	1	680 Ω	RES, 680 ohm, 5%, 1W	2512	std	
R2	1	100 k Ω	Resistor, Chip, 1/10W, 1%	0603	Std	
R3, R10	2	1.0 M Ω	Resistor, Chip, 1/8W, 1%	0805	Std	
R4	1	200 Ω	Resistor, 2W, 5%, Axial	5mmx15mm	Yageo	FRM200JR-73-200R
R5	1	402 k Ω	Resistor, Chip, 1/10W, 1%	0603	Std	
R6, R9	1	499 k Ω	Resistor, Chip, 1/8W, 1%	0805	std	
R7	1	200 Ω	RES, 200 ohm, 5%, 1W	2512	std	
R8	1	1.82 Ω	Resistor, Chip, 1/8W, 1%	0805	Std	
VR1	0					

EVALUATION BOARD/KIT/MODULE (REF DESIGN) WARNINGS, RESTRICTIONS AND DISCLAIMER

For Feasibility Evaluation Only, in Laboratory/Development Environments. The REF DESIGN is not a complete product. It is intended solely for use for preliminary feasibility evaluation in laboratory / development environments by technically qualified electronics experts who are familiar with the dangers and application risks associated with handling electrical / mechanical components, systems and subsystems. It should not be used as all or part of a production unit.

Your Sole Responsibility and Risk. You acknowledge, represent and agree that:

1. You have unique knowledge concerning Federal, State and local regulatory requirements (including but not limited to Food and Drug Administration regulations, if applicable) which relate to your products and which relate to your use (and/or that of your employees, affiliates, contractors or designees) of the REF DESIGN for evaluation, testing and other purposes.
2. You have full and exclusive responsibility to assure the safety and compliance of your products with all such laws and other applicable regulatory requirements, and also to assure the safety of any activities to be conducted by you and/or your employees, affiliates, contractors or designees, using the REF DESIGN. Further, you are responsible to assure that any interfaces (electronic and/or mechanical) between the REF DESIGN and any human body are designed with suitable isolation and means to safely limit accessible leakage currents to minimize the risk of electrical shock hazard.
3. Since the REF DESIGN is not a completed product, it may not meet all applicable regulatory and safety compliance standards (such as UL, CSA, VDE, CE, RoHS and WEEE) which may normally be associated with similar items. You assume full responsibility to determine and/or assure compliance with any such standards and related certifications as may be applicable. You will employ reasonable safeguards to ensure that your use of the REF DESIGN will not result in any property damage, injury or death, even if the REF DESIGN should fail to perform as described or expected.

Certain Instructions. Exceeding the specified REF DESIGN ratings (including but not limited to input and output voltage, current, power, and environmental ranges) may cause property damage, personal injury or death. If there are questions concerning these ratings please contact a TI field representative prior to connecting interface electronics including input power and intended loads. Any loads applied outside of the specified output range may result in unintended and/or inaccurate operation and/or possible permanent damage to the REF DESIGN and/or interface electronics. Please consult the REF DESIGN User's Guide prior to connecting any load to the REF DESIGN output. If there is uncertainty as to the load specification, please contact a TI field representative. During normal operation, some circuit components may have case temperatures greater than 60°C as long as the input and output ranges are maintained at nominal ambient operating temperature. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors which can be identified using the REF DESIGN schematic located in the REF DESIGN User's Guide. When placing measurement probes near these devices during normal operation, please be aware that these devices may be very warm to the touch.

Agreement to Defend, Indemnify and Hold Harmless. You agree to defend, indemnify and hold TI, its licensors and their representatives harmless from and against any and all claims, damages, losses, expenses, costs and liabilities (collectively, "Claims") arising out of or in connection with any use of the REF DESIGN that is not in accordance with the terms of this agreement. This obligation shall apply whether Claims arise under the law of tort or contract or any other legal theory, and even if the REF DESIGN fails to perform as described or expected.

Safety-Critical or Life-Critical Applications. If you intend to evaluate TI components for possible use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, such as devices which are classified as FDA Class III or similar classification, then you must specifically notify TI of such intent and enter into a separate Assurance and Indemnity Agreement.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated