



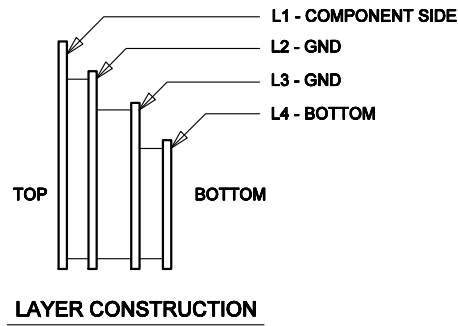

LTC CONFIDENTIAL - For Customer Use Only

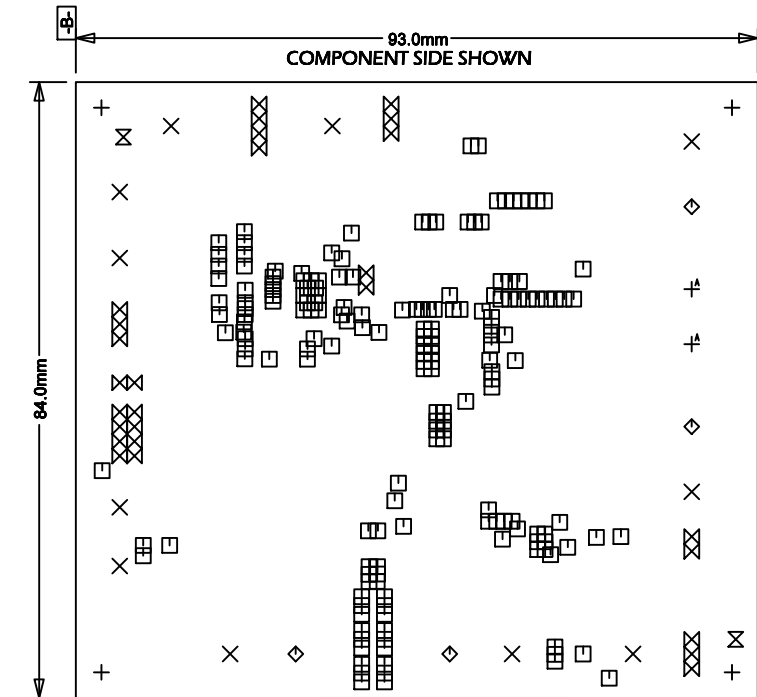


REVISION HISTORY

ECO	REV	DESCRIPTION	DATE	APPROVED
	4	PROD	03/30/16	

NOTES: UNLESS OTHERWISE SPECIFIED,

- ARTWORK P/N DC2117A REV 4.
- FAB PER IPC-A-600
- PCB SHALL MEET RoHS COMPLIANCE.
- MATERIAL:
 - LAMINATE: EPOXY FIBERGLASS, NEMA GRADE FR-4
FLAMMABILITY RATING: 94 V-2 MINIMUM.
 - THICKNESS: 1.6 +/- 0.1 mm
 - CLAD: 2 OZ. (50um) EXTERNAL LAYERS.
1 OZ. (25um) COPPER ON TWO INTERNAL LAYERS.
- FINISH:
 - COATING: SOLDERMASK OVER BARE COPPER,
COLOR, GREEN LPI.
 - PLATING: GOLD IMMERSION BOTH SIDES.
 - SILKSCREEN: COMPONENT SIDE WITH WHITE
NON-CONDUCTIVE INK.
- TOLERANCES:
 - WARPAGE: (0.075mm) MAX. ALONG THE LONGEST
DIAG. AS PER IPC-TM650 METHOD 2.4.22.
 - ETCHING: +0.03mm, -0.3mm OF MASTER PATTERN.
 - REGISTRATION: 0.075mm MAX.
 - MASK THICKNESS: 0.025mm MIN., 0.075mm MAX.
 - HOLE PLATING: 22um +/- 3um.
- SIZE:
 - CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
- HOLE DIAMETERS ARE POST-PLATED SIZES.
- DEBURR AND BREAK ALL SHARP EDGES.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE
CODE.
- SCORING:




SIZE	QTY	SYM	PLATED	TOL
0.25	180		YES	+/-0.08
0.9	27		YES	+/-0.08
1.15	2		YES	+/-0.08
1.78	2		NO	+/-0.13
2.41	11		YES	+/-0.13
4.75	4		NO	+/-0.13
5.21	4		YES	+/-0.13

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ON ANGLE ± 1°

.XX ± 0.25
.XXX ± 0.127

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS

DATE

DRAWN

05/31/15

CHECKED

APPROVED

03/30/16

DESIGNED BY



1630 McCarthy Blvd.
Milpitas, CA 95035

www.linear.com
Phone: (408)432-1900
Fax: (408)434-0507

TITLE

FAB, LTC3895EFE, HIGH INPUT VOLTAGE
SYNCHRONOUS BUCK CONVERTER

SIZE
A

CAGE CODE

DWG NO.

DC2117A

REV
4

SCALE 1/1

FILENAME: 2117a-4.PCB

SHEET 1 OF 1